


SPECIFICATION

Nominal Voltage	12V (6 cells in series)	
Rated Capacity	200.0Ah	(C ₁₀ , 1.80V/cell)
Dimensions(mm)	Length	522±3 mm
	Width	238±3 mm
	Height	218±3 mm
	Total Height	221±3 mm
Nominal Capacity @25°C (Ah)	20 Hour rate (10.90A to 10.8 volts)	218.0Ah
	10 Hour rate (20.40A to 10.8 volts)	204.0Ah
	5 Hour rate (35.00A to 10.8 volts)	175.0Ah
	1 Hour rate (126.6A to 10.5 volts)	126.6Ah
Approx. Weight	60.0 kg	
Terminal	T13	
Max.Discharge Current	1600A @25°C (5s)	
Internal Resistance	3.5mΩ @25°C (Full Charged Battery)	
DOD 80%	≥500 Cycles @25°C	
Ambient Temperature	Charge: -20°C~50°C	
	Discharge: -40°C~60°C	
	Storage: -20°C~60°C	
Container Material	A.B.S, UL94-HB, UL94-V0, Optional	
Self Discharge	Deep Cycle Gel Battery can be stored for more than 6 months at 25°C. Self-Discharge ratio less than 3% per month at 25°C. Please charge batteries before using.	



COMPANY CERTIFICATION

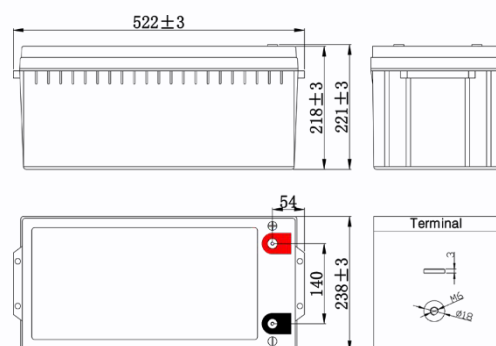


CONSTANT CURRENT DISCHARGE CHARACTERISTICS (A), (25°C)

F.V/Time	5min	10min	15min	30min	60min	2H	3H	5H	8H	10H	20H
1.60V/cell	680.0	453.0	362.8	225.0	130.0	77.70	55.20	36.96	24.84	21.20	11.60
1.70V/cell	610.0	417.0	345.0	219.0	128.2	76.70	54.20	36.08	24.44	20.90	11.30
1.75V/cell	550.0	385.0	329.0	213.0	126.6	75.70	53.60	35.54	24.20	20.70	11.10
1.80V/cell	490.0	351.0	309.0	204.8	124.0	74.66	53.00	35.00	23.84	20.40	10.90


CONSTANT WATTAGE DISCHARGE CHARACTERISTICS (WATT), (25°C)

F.V/Time	5min	10min	15min	30min	60min	2H	3H	5H	8H	10H	20H
1.60V/cell	1173.0	807.9	659.1	420.0	249.2	151.5	109.5	73.49	49.43	42.22	23.18
1.70V/cell	1077.7	757.6	635.4	412.5	246.8	150.2	107.8	71.92	48.76	41.73	22.60
1.75V/cell	985.4	709.0	611.4	404.7	244.8	148.9	106.8	71.02	48.40	41.40	22.20
1.80V/cell	890.2	655.2	579.4	392.5	240.8	148.1	105.9	70.00	47.68	40.80	21.80


Charge Characteristics Curve

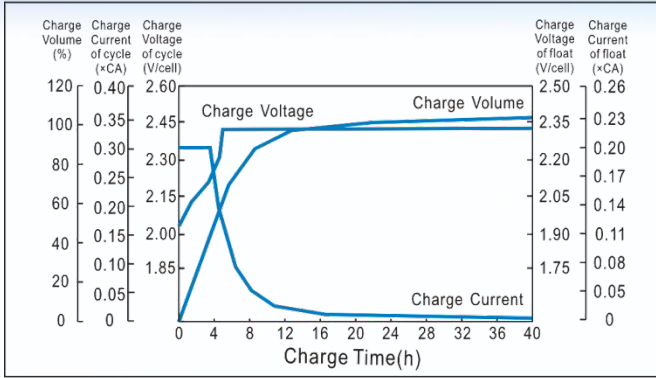


Discharge Characteristics Curve

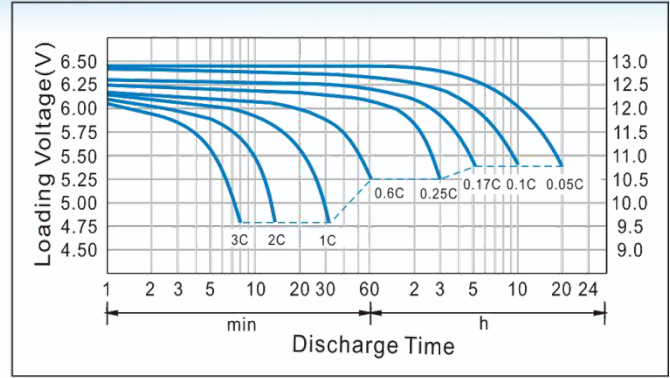

Cycle service life in relation to depth of discharge

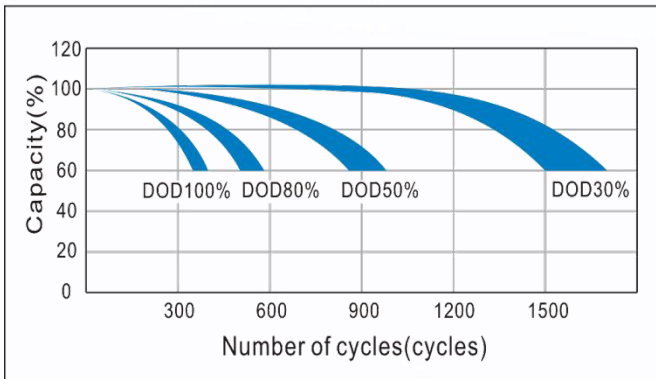

Capacity Storage Characteristics

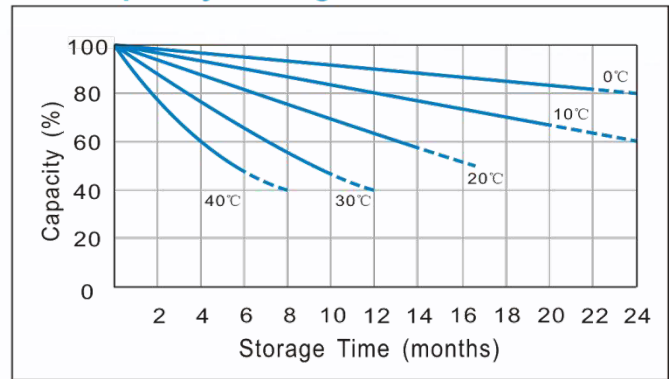

CAPACITY FACTORS WITH DIFFERENT TEMPERATURE

Battery type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V & 12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V & 12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

MAINTENANCE & CAUTIONS

☑ Charging Procedure:

Application	Charging method	Charge voltage at 25°C	Temperature compensation coefficient of charging voltage	Max. charging current	Temperature
For standby power source	Constant voltage charging (With current restriction)	2.25~2.30 V/cell	-3mV/°C/cell	0.2CA	-20~50°C
For cycle service		2.40~2.45 V/cell	-4mV/°C/cell	0.3CA	

☑ Float service:

Every month, recommend inspection every battery voltage.

Every three months, recommend equalization charge for one time. Equalization charge method: Step 1: Discharge: 100% rate capacity discharge. Step 2: Charge: Max. Current 0.3CA, constant voltage 2.40-2.45V/Cell charge 24h.

☑ Cycle service:

Avoid battery over discharge, especially battery series connection use.

Charged with recommend voltage, ensure battery can be full recharged.

In general, recharge capacity should be 1.1~1.15 times discharge capacity.

☑ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, Ambient temperature and charging voltage.

☑ Charge the batteries at least once every six months, if they are stored at 25°C. Charging Method:

Constant Voltage : -0.2C×2h+2.40~2.45V/cell×24h , Max. Current 0.25CA

Constant Current : -0.2C×2h+0.1C×12h

Fast : -0.2C×2h+0.3C×4h

☑ Terminal of torque:

Bolt	M5	M6	M8
Terminal	T3, T10	T4, T7, T11, T12, T13	T5, T6, T8, T9, T14
Torque	6~7N.m	8~10N.m	10~12N.m